

Design Sheet - Isedio ArmourJoint Adjustable/Fixed

Please provide: contact details; project details; design conditions; load information

Contact Details

Contact Name

Company

Office Address

.....

Tel

Fax

Email

Project name and town

Design Conditions

Concrete strength (C20/25 min)

Max joint width (30mm max) (F)

Slab thickness (T)

For ArmourJoint Fixed only

- ☐ Position the dowel at the mid-height of the slab
- or
- ☐ Position the dowel at _____ mm from the top of the slab

Isedio ArmourJoint Adjustable




Load Information

Location Reference	Ultimate Load (kN/m)	Joint Length	Slab Thickness


Isedio ArmourJoint Fixed



Corner
Intersection

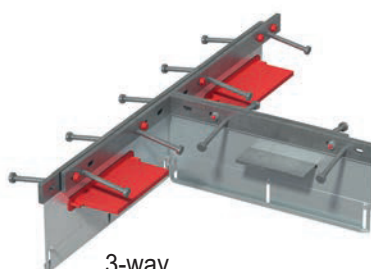

3-way
Intersection

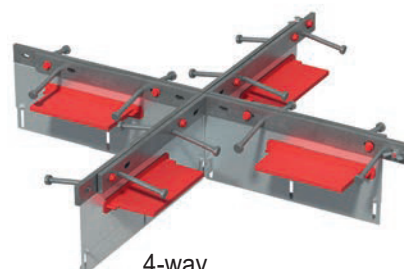

4-way
Intersection

Return on email to: info.au@leviat.com

Leviat, 98 Kurrajong Ave, Mount Druitt, Sydney, NSW 2770, Australia

Tel: 1300 304 320 Web: Isedio.com

